


Job/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

Job Type: \_\_\_\_\_  
 Date: \_\_\_\_\_



3 year warranty standard, see details on next page.

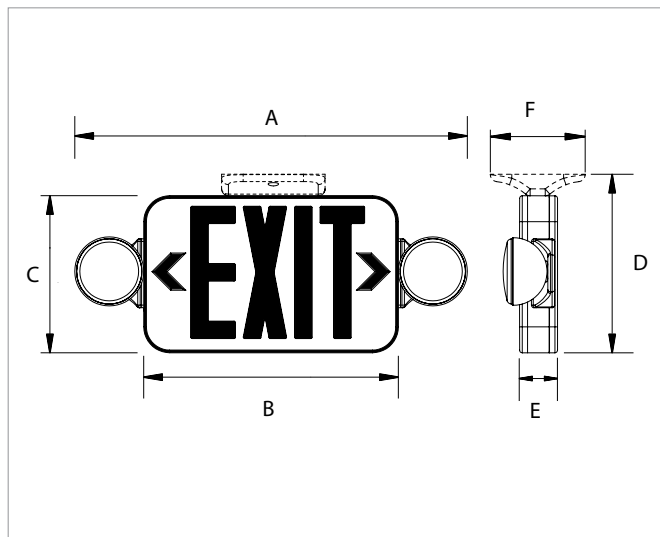

### PRODUCT OVERVIEW

The PACO PCH series combination exit and emergency unit features performance and reliability in a small and attractive package. Two 1.5W LED fully adjustable lamp heads ensure emergency lighting performance, accurate positioning and reduced maintenance. Available with red or green LED's, the exit face features a reduced housing size and soft, rounded edges. The thermoplastic housing comes in white as standard; optional black is available. The quick connect installation system allows for effortless surface mount installation.

### SPECIFICATIONS: INTERNAL

The PACO PCH uses a rechargeable, maintenance free 3.6V 900mAH nickel cadmium battery. Universal 120/277VAC input. The circuit board features an onboard solid state transformer, low voltage disconnect and brownout protection. Red or green LEDs totaling less than 2W.

Series	A	B	C	D	E	F
PCH	17.90"	11.60"	7.20"	8.20"	1.75"	4.33"
	456mm	295mm	183mm	208mm	44.45mm	110mm

### SPECIFICATIONS: EXTERNAL

The PACO PCH series is constructed from high impact, injection molded thermoplastic. White finish is standard. Each emergency head houses a single LED cluster that totals 1.5W. The exit sign features field adjustable chevrons. The PACO PCH series can be universally mounted single or double face (extra faceplate included). Integrated test switch/monitor LED gives immediate unit status. Damp location rated.

### ORDERING INFORMATION

Series	LED Color	Options
PCH	R (red)	B (black)
	G (green)	RC (remote capable)

### PCH BUILDER

Series	LED Color	Options
--------	-----------	---------

EXAMPLE: PCH-R-B  
 DESCRIPTION: PACO combo, Red LED, Black Housing, Damp Location

## **BATTERY**

The **PACO PCH** series is design with a 3.6V 900mAH maintenance free sealed nickel cadmium battery that provides minimum emergency duration of 90 minutes. The recharge time of the battery is 24 hours.

## **INSTALLATION**

The **PACO PCH** combination is designed for surface wall or ceiling installations. Suitable for indoor / damp location environments.

## **WARRANTY**

The **PACO PCH** series comes with a 3-year factory warranty. Deliberate damage, misuse, improper installation effectively void the warranty. For complete warranty details see online.