


Job/Location:			
Contractor:		Job Type:	
Prepared By:		Date:	



DIMENSIONS

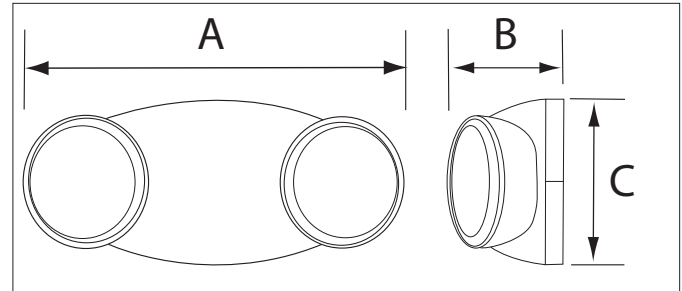

Wattage	A	B	C
2x0.5W	9"	2.75"	4"
	228.6mm	69.8mm	101.6mm

ORDERING INFORMATION

Series	Options
PE-1	B (black housing)

EXAMPLE: PE-1B
 DESCRIPTION: PACO emergency luminaire, emergency only, 3.6V 2x0.5W, black housing, damp location.

PRODUCT OVERVIEW

The **PACO PE-1** emergency unit features performance and reliability in a small and attractive package. Two fully adjustable 0.5W lamp heads ensure emergency lighting performance, accurate positioning and reduced maintenance. The thermoplastic housing comes standard finished in white. An optional black housing finish is available. The quick connect installation system allows effortless surface mount installation.

INSTALLATION

The **PACO PE-1** emergency unit is designed for surface wall or ceiling installations. Suitable for indoor / damp location environments.

EXTERNAL SPECIFICATIONS

The **PACO PE-1** is constructed from high impact, UV-stabilized, UL 94 V-0 plastic. White housing finish is standard. White **0.5W LED** emergency lighting heads are fully adjustable and glare-free in matching color. Universal mounting plate allows for quick-connect installation. Integrated test switch / monitor LED gives immediate unit status.

INTERNAL SPECIFICATIONS

The **PACO PE-1** uses a rechargeable, maintenance free 3.6V 900mAH nickel cadmium battery. Universal 120/277VAC input. The circuit board features an onboard solid state transformer, low voltage disconnect and brownout protection.

WARRANTY

The **PACO PE-1** emergency lighting comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

HOUSING

The **PACO PE-1** is constructed from high impact, UV-stabilized, UL 94 V-0 plastic. White housing finish is standard. The quick connect installation system allows effortless surface ceiling and wall mount installation.

BATTERY

The **PACO PE-1** uses a rechargeable, maintenance free 3.6V 900mAH nickel cadmium battery that provides minimum emergency duration of 90 minutes. The recharge time of the battery is 24 hours.

LAMP HEAD FEATURES

The **PACO PE-1** is supplied with two white **0.5W LED** emergency lighting heads. Lamp heads are fully adjustable and glare-free in matching color.

DESIGN FEATURES

The **PACO PE-1** features performance, reliability, full adjustability and quick installation in a small stylish package. Snap-together construction speeds installation, easy field wiring and durable construction make **PACO PE-1** emergency light a favorite among contractors.